


SPECIFICATION SERIES


PROJECT _____
TYPE _____

13" RECESSED CFL LENSLIGHT

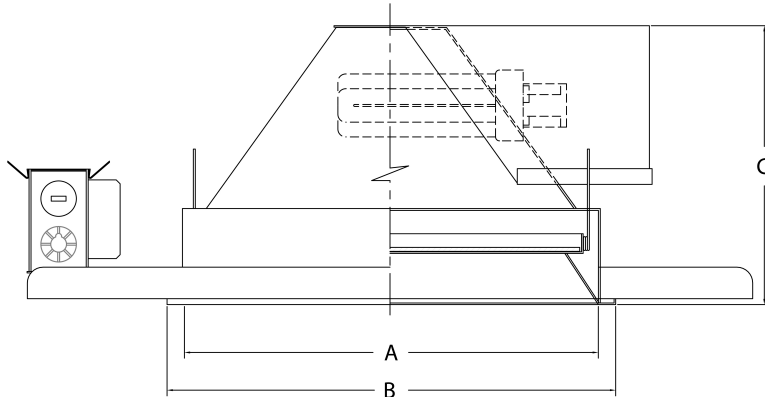

FEATURES:

- LOW IRIDESCENT REFLECTOR
- HEAVY EXTRUDED ALUMINUM HEAT SINK
- GALVANIZED STEEL FRAME
- SUITABLE FOR THROUGH BRANCH CIRCUIT WIRING
- FACTORY PRE-WIRED FOR EASY INSTALLATION
- UL LISTED UNIVERSAL VOLTAGE ELECTRONIC BALLAST

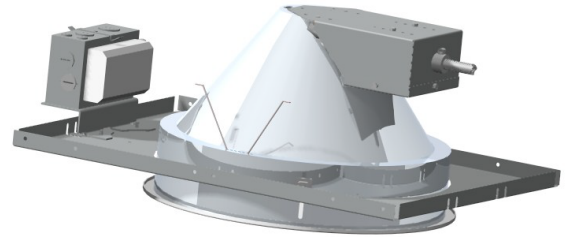

	A	B	C	LENGTH	WIDTH	CUT OUT
INCH	13.25	14.25	9.00	20.00	16.25	13.50
MM	336.55	361.95	228.60	508.00	412.75	342.90

ORDER INFORMATION:

SERIES	LAMP	VOLTS	REFLECTOR	TRIM	COLOR	LENS	OPTION	OPTION	OPTION
SP-HFL13	1 OR 2-26Q	120/277	CL	CLW	MTL	CGL	DIMA	EM	CP
	1 OR 2-32T		CWW	MWT	WHT	C73	DIMH	ETS	WET
	1 OR 2-42T				BLK	FNL	F		
	1-57T				BRZ				
	1-70T								

OPTIONS:

CL	CLEAR	FNL	FRESNEL LENS
CWW	CLEAR WALL WASH	DIMA	ADVANCE MK10 DIMMING
CLW	CLEAR WHITE TRIM	DIMH	LUTRON HILUME DIMMING
MWT	MATTE WHITE TRIM	EM	EMERGENCY BATTERY PACK
MTL	BRUSHED/POLISHED ALUMINUM DOOR	ETS	EMERGENCY TRANSFER DEVICE
WHT	WHITE POWDER COAT DOOR	SCA	SLOPE CEILING ADAPTOR*
BLK	BLACK POWDER COAT DOOR	F	FUSE
BRZ	BRONZE POWDER COAT DOOR	CP	CHICAGO PLENUM*
CGL	CLEAR GLASS LENS*	WET	UL WET LOCATION*
C73	CORNING PATTERN 73 LENS		

* PLEASE CONSULT FACTORY

LIGHT ONE, INC. P.O. BOX 389-PLAINFIELD, IL 60544 • TEL:773-7478100 • FAX:773-747-8778

WWW.LIGHTONEINC.COM